


**PSN 140**  
Product data sheet

Ref: PLA 1460

**AcuLite® E20F**



**Generic Description**

A high performance light weight flexible material engineered to give excellent broad band sound absorption

**Function**

Airborne noise reduction and control, typically used :

- **Behind automotive trim**
- **Above automotive headliners**
- **Within automotive instrument panels**
- **As a lining within acoustic enclosures**

**Component Detail**

Machine cut finished parts, with optional edge sealing and optional self-adhesive systems

**Material Properties**

• **Acoustic performance**

The chart below shows typical acoustic absorption performance in a large scale test. The test is performed on the material from which a finished component is manufactured.

• **Physical characteristics**

Density : 275gsm  
Nominal uncompressed thickness : 10mm  
Polymer blend : 18%PP, 73%PET, 9%PU-R

• **Flammability : ISO 3795 .... 0mm/min**

**Features**

- Dimensionally stable
- Can be ultrasonically welded to substrates
- Can be supplied with clips for mechanical attachment
- Virtually no dusting after processing.
- Wide range of self-adhesives available

• **Colour**

White core fibre. White facing textile.

• **Service Temperature**



Continuous : 100deg C  
Peak (short duration) : 120deg C

• **OEM usage**

AcuLite is currently approved and used in Europe by Nissan, Honda, Toyota, Mini, Ford, Jaguar, Land Rover, Mercedes, Aston-Martin, Renault, PSA, McLaren Automotive

**Self Adhesive Availability**

- SBR / Solvented Acrylic / Water based Acrylic compounds
- Scrim supported / Film supported / Transfer adhesive presentations
- Striped or solid coverage
- Silicone paper or plastic film release liners
- Ultra-low VOC emission adhesive technology available

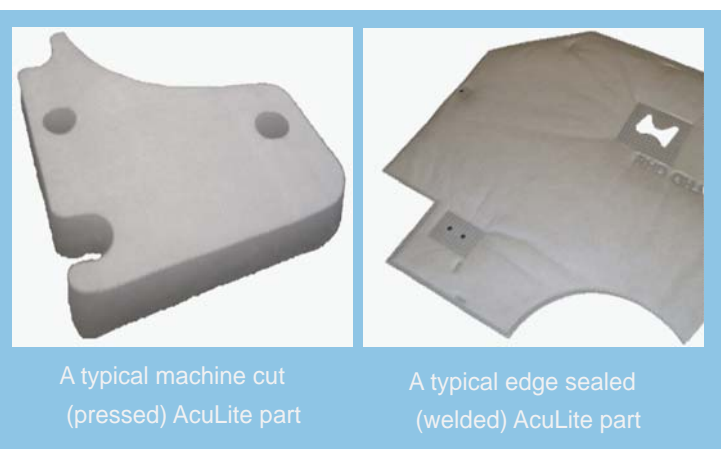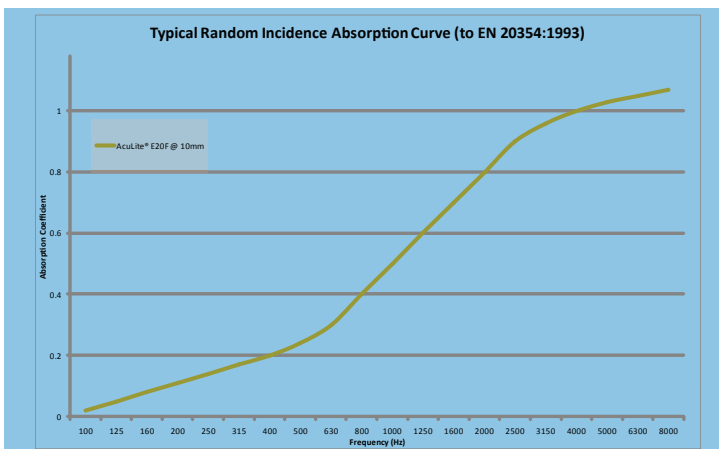

Authorised

Issue

2

Date

19-12-12

Pritex Ltd. is a TS16949 registered company.

The company reserves the right to alter specifications. The AcuLite name and logo are registered trademarks of Pritex Ltd.

Pritex currently tests components to a number of automotive manufacturers' specifications. We would be pleased to establish individual requirements.